

KEY FEATURES

- Next generation high performance 1" (25,4 mm) exit compression driver
- Deplocex® Patent Pending Technology for improved thermal dissipation, low power compression losses and high power handling
- 1,1" (28 mm) Copper Clad Aluminum voice coil
- 80 W program power above 2 kHz
- Sensitivity: 108 dB (1W / 1m)
- VPEQ® Patent Pending Technology for linear frequency response
- Exclusive Advanced Polyester annular ring design optimized with F.E.M for linear and extended response with minimized resonances
- Copper shorting cap for reduced distortion, linear inductance and increased output
- F.E.M. optimized ceramic magnetic circuit



TECHNICAL SPECIFICATIONS

Throat diameter	25,4 mm	1 in
Rated impedance		8 Ω
Minimum impedance		7 Ω
D.C. resistance		6 Ω
Power capacity ¹	40 W _{AES} above 2 kHz	
Program power ²	80 W above 2 kHz	
Sensitivity ³	108 dB	1W / 1m @ Z _N coupled to TD-164


Frequency range	2 - 20 kHz	
Recommended crossover	2 kHz or higher (12 dB/oct min.)	
Voice coil diameter	28 mm	1,1 in
Flux density	1,4 T	
BI factor	2,3 N/A	

Notes:

¹ The power capacity is determined according to AES2-1984 (r2003) standard.

² Program power is defined as the transducer's ability to handle normal music program material.

³ Sensitivity was measured at 1m distance, on axis, with 1W input, averaged in the range 2 - 7 kHz

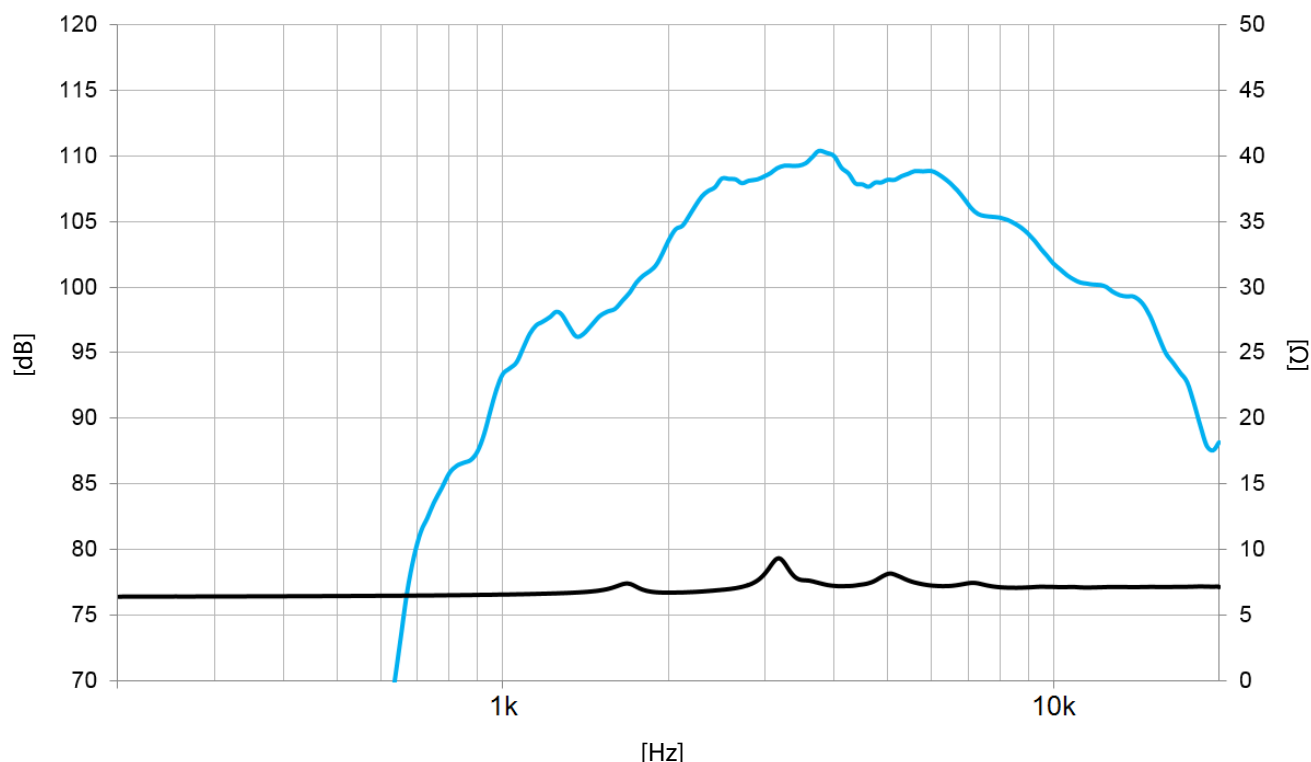

Note: On axis frequency response measured coupled to TD-164 horn in anechoic chamber, 1W / 1m

MOUNTING INFORMATION

Overall diameter	90,4 mm	3,55 in
Depth	55 mm	2,16 in
Mounting	Three M5 threaded holes, 120° apart on 57 mm (2,24 in) diameter circle Two M5 threaded holes, 180° apart on 76,2 mm (3 in) diameter circle	
Net weight	0,5 kg	1,1 lb
Shipping weight	0,8 kg	1,7 lb

DIMENSION DRAWING

