

TECHNICAL SPECIFICATIONS

Nominal diameter	300 mm	12 in
Rated impedance		8 Ω
Minimum impedance		6,8 Ω
Power capacity ¹		350 W _{AES}
Program power ²		700 W
Sensitivity	99 dB	1W / 1m @ Z _N
Frequency range		55 - 6.000 Hz
Voice coil diameter	63,5 mm	2,5 in
BI factor		15,7 N/A
Moving mass		0,050 kg
Voice coil length		15 mm
Air gap height		7 mm
X _{damage} (peak to peak)		26 mm

THIELE-SMALL PARAMETERS ³

Resonant frequency, f _s	50 Hz
D.C. Voice coil resistance, R _e	5,0 Ω
Mechanical Quality Factor, Q _{ms}	4,1
Electrical Quality Factor, Q _{es}	0,32
Total Quality Factor, Q _{ts}	0,29
Equivalent Air Volume to C _{ms} , V _{as}	87 l
Mechanical Compliance, C _{ms}	205 μm / N
Mechanical Resistance, R _{ms}	3,7 kg / s
Efficiency, η ₀	3,2 %
Effective Surface Area, S _d	0,055 m ²
Maximum Displacement, X _{max} ⁴	6 mm
Displacement Volume, V _d	330 cm ³
Voice Coil Inductance, L _e	0,4 mH


MATERIALS

Voice coil winding	Aluminum
Voice coil former	Glass fiber
Spider	Polycotton
Magnet	Neodymium
Cone	Paper
Frame	Steel



MOUNTING INFORMATION

Overall diameter	310 mm	12,2 in
Bolt circle diameter	292 mm	11,5 in
Baffle cutout diameter:		
- Front mount	280 mm	11,0 in
Depth	125 mm	4,9 in
Net weight	3,0 kg	6,6 lb
Shipping weight	3,7 kg	8,1 lb

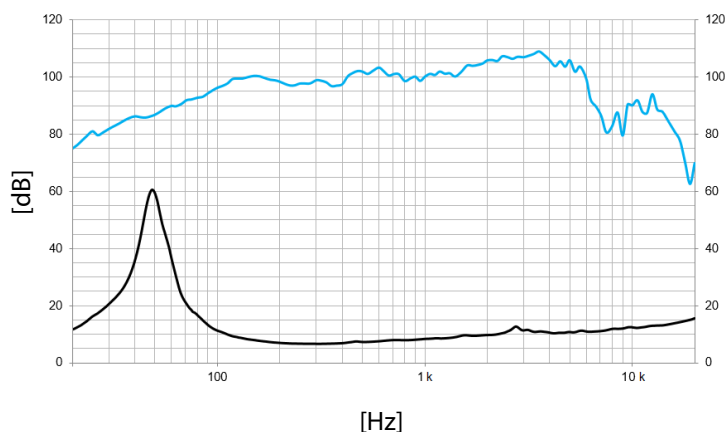

Note: On axis frequency response measured with loudspeaker standing on infinite baffle in anechoic chamber, 1W @ 1m

Notes:

This datasheet is done with the measurement of a laboratory prototype. Small differences may appear when the driver is transferred to the production line and manufactured in big quantities.

¹ The power capacity is determined according to AES2-1984 (r2003) standard.

² Program power is defined as power capacity + 3 dB.

³ T-S parameters are measured after an exercise period using a preconditioning power test. The measurements are carried out with a velocity-current laser transducer and will reflect the long term parameters (once the loudspeaker has been working for a short period of time).

⁴ The X_{max} is calculated as (L_{vc} - H_{ag})/2 + (H_{ag}/3,5), where L_{vc} is the voice coil length and H_{ag} is the air gap height.